



EP Series

變壓器係根據客戶提供的規格書及bobbin的結構設計。
Transformer is based on a customers' specifications, demand and construction of bobbin to set up.

How To Order

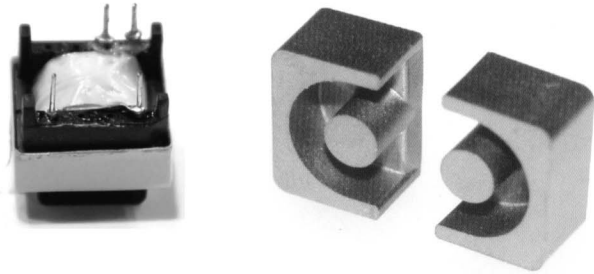

Construction of Bobbin

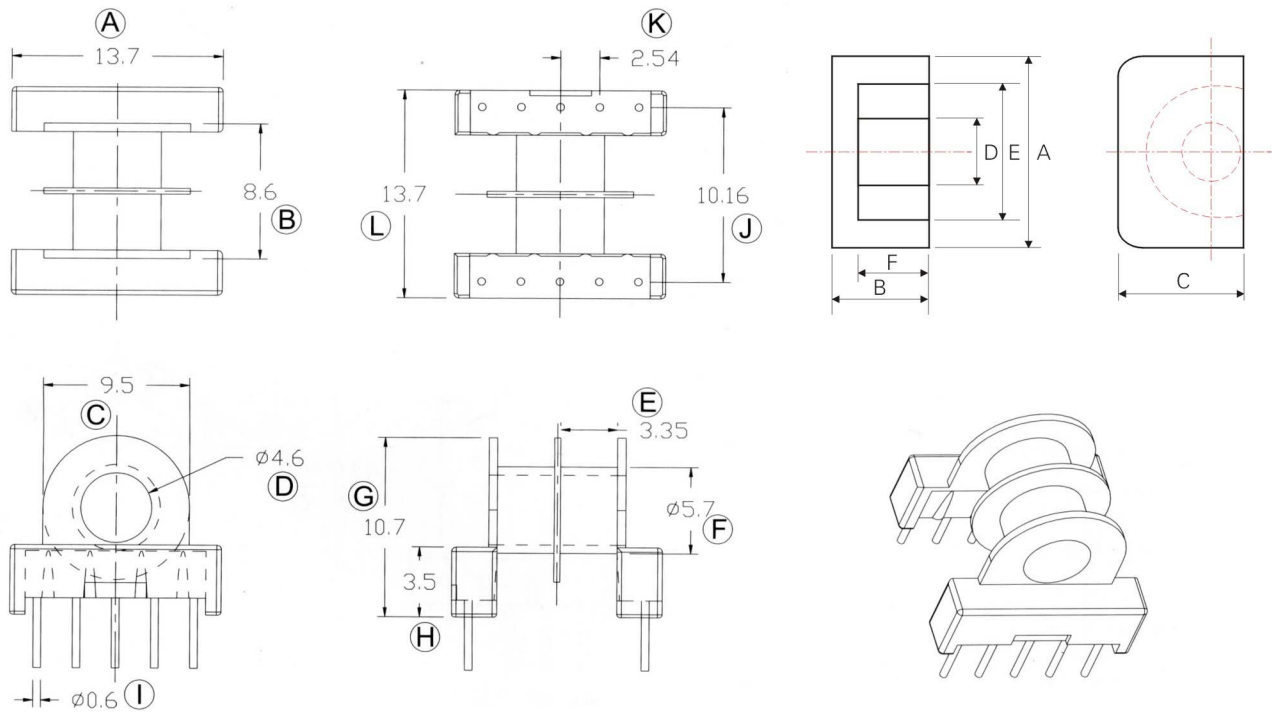

規 格 Core size	尺 寸 Dimensions(mm)						有效參數 Effective parameters			
	A	B	C	D	E(min)	F	C1 (mm ⁻¹)	Ae (mm ²)	Le (mm)	Ve (mm ³)
EP7	9.2±0.2	3.7±0.1	6.3±0.2	3.3±0.1	7.4±0.2	2.6±0.15	1.52	10.3	15.7	162
EP10	11.5±0.3	5.1±0.1	7.6±0.2	3.3±0.15	9.4±0.2	3.7±0.15	1.70	11.3	19.2	217
EP13	12.5±0.3	6.42±0.2	8.8±0.2	4.35±0.15	10.0±0.3	4.65±0.15	1.24	19.5	24.2	472
EP15	15.0±0.3	7.5±0.2	10.0±0.2	4.8±0.2	11.8±0.5	5.2±0.2	1.03	23.7	25.4	602
EP18	18.0±0.4	8.4±0.2	11.0±0.2	5.65±0.2	12.0±0.4	5.7±0.2	0.84	33.9	28.5	964
EP24	24.0±0.5	10.7±0.2	15.0±0.3	5.8±0.2	16.5±0.4	7.2±0.2	0.51	78.3	39.8	3110

規 格 Core size	電感因數 AL(nH/N ²) ±25%					
	HG302	HG502 HS502	HG702 HS702	HG103 HS103	HG123	HG153
EP7		2000	2800	3600	4500	6000
EP10		2100	3360	4000	5000	6600
EP13		2800	4200	5600	7000	9330
EP15		4300		9000		
EP18		4800	6000	8000		
EP24				13500		