


## 陶瓷電容器外形規格

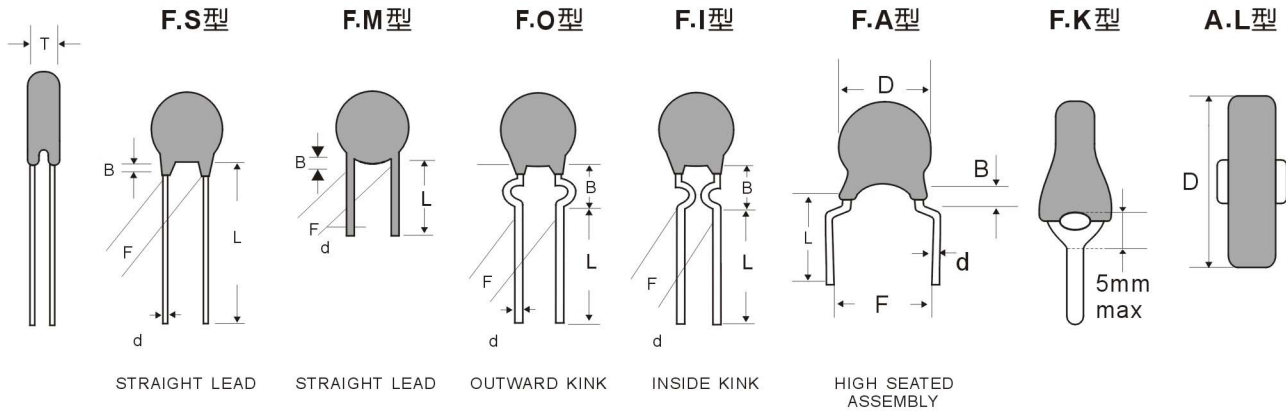

MODEL	Working Voltage	T (mm) (max)	d (mm) ±0.1	L (mm)	F (mm)	B (mm) (max)
F S	12~25	3	0.45~1.0	3~50	2.5 <sup>+1</sup> <sub>-0.5</sub> /5.0±0.8	2
	50~100	3			2.5 <sup>+1</sup> <sub>-0.5</sub> /5.0±0.8	2
	500	3			5.0±0.8	3
	1KV~3KV	5			5.0/6.35/7.5±0.8	3
	3KV~UP	20			7.5/10/12.5/15/20±1	3
F A	12~25	3	0.45~1.0	3~50	2.5 <sup>+1</sup> <sub>-0.5</sub> /5.0±0.8	2
	50~100	3			2.5 <sup>+1</sup> <sub>-0.5</sub> /5.0±0.8	2
	500	3			5.0±0.8	3
	1KV~3KV	5			5.0/6.35/7.5±0.8	3
	3KV~20KV	10			10±1	3
F O	12~25	3	0.45~0.8	3~50	5.0±0.8	5
	50~100	3			5.0±0.8	5
	500	3			5.0±0.8	5
	1KV~3KV	5			5.0/6.35/7.5±0.8	5
	3KV~20KV	10			5/7.5/10±1	5
F I	12~25	3	0.45~0.8	3~50	5.0±0.8	5
	50~100	3			5.0±0.8	5
	500	3			5.0±0.8	5
	1KV~3KV	5			5.0/6.35/7.5±0.8	5
	3KV~6.3KV	8			7.5/10±1	5
F K	1KV~3KV	5	0.45~0.8	3~50	5.0/6.35/7.5±0.8	5
	3KV~30KV	13			5/7.5/10±1	5
AL	10KV~250KV	40				