


Packing


- Bulk Packaging : Packing code (B)
- Tape Packaging : Please specify the packing code when ordering.

Packing Code	Pcs /Reel	Reel size	
5	500	7"	
1	1000	7"	
2	2000	7"	
3	3000	7"	
T	4000	7"	
U	10000	0402	7"
		0603	10"
S	15000	13"	
V	16000	13"	
W	20000	13"	

■ Appearance of Taping

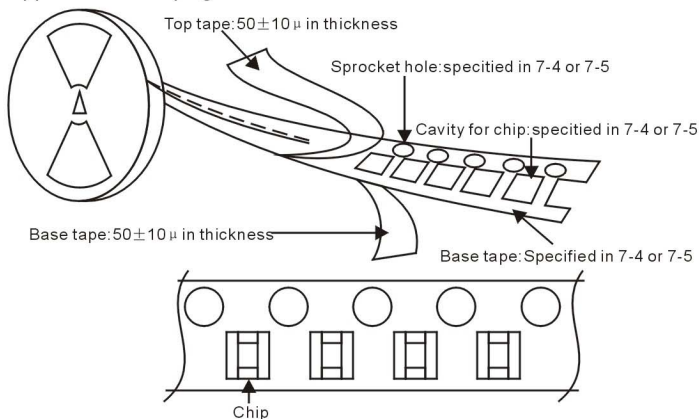

■ Dimension of paper Tape

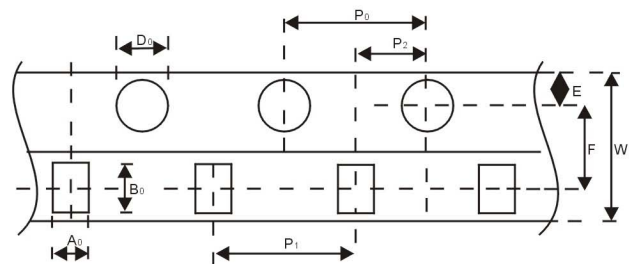

Unit:mm

Mark	Chip size										tolerance
	0201	0402	0603	0805	1206	1210	1808	1812	2211 2220 2225	3035	
A ₀ (width of compartment)	0.4	0.63	1	1.5	1.85	2.9	2.4	3.6	5.5 6.7	9.3	±0.1
B ₀ (length of compartment)	0.63	1.13	1.8	2.25	3.45	3.6	4.9	4.9	6.0	7.9	±0.1
W (tape width)	8	8	8	8	8	8	12	12	12 16	16	±0.3
E (distance between a sprocket hole and upper)	1.75	1.75	1.75	1.75	1.75	1.75	1.75	1.75	1.75	1.75	±0.1
F (distance between centers of a sprocket and chip hole)	3.2	3.5	3.5	3.5	3.5	3.5	5.5	5.5	5.5 7	7	±0.1
D ₀ (diameter of sprocket hole)	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	1.55	±0.1
P ₁ (compartment pitch)	2 1	2	4	4	4	4	8	8	8 12	12	±0.1
P ₀₂ (distance between centers of compartment hole and chip hole)	1 0.5	1	2	2	2	2	4	4	4 6	6	±0.1
P ₀ (Sprocket hole pitch)	2 1	2	4	4	4	4	8	8	8 12	12	±0.1

- Paper thickness T :0.65±0.05 mm(for 0402 product)
- Paper thickness T :0.75±0.05mm(for thickness code S)
- Paper thickness T :0.95±0.05mm(for thickness code :P、M、H)
- Note : (1). The top tape and bottom tape shall not protrude beyond the edges of the tape, and shall not cover sprocket holes
- Note : (2). Cumulative tolerance of sprocket holes 10 pitch : ±0.3mm