


How To Order

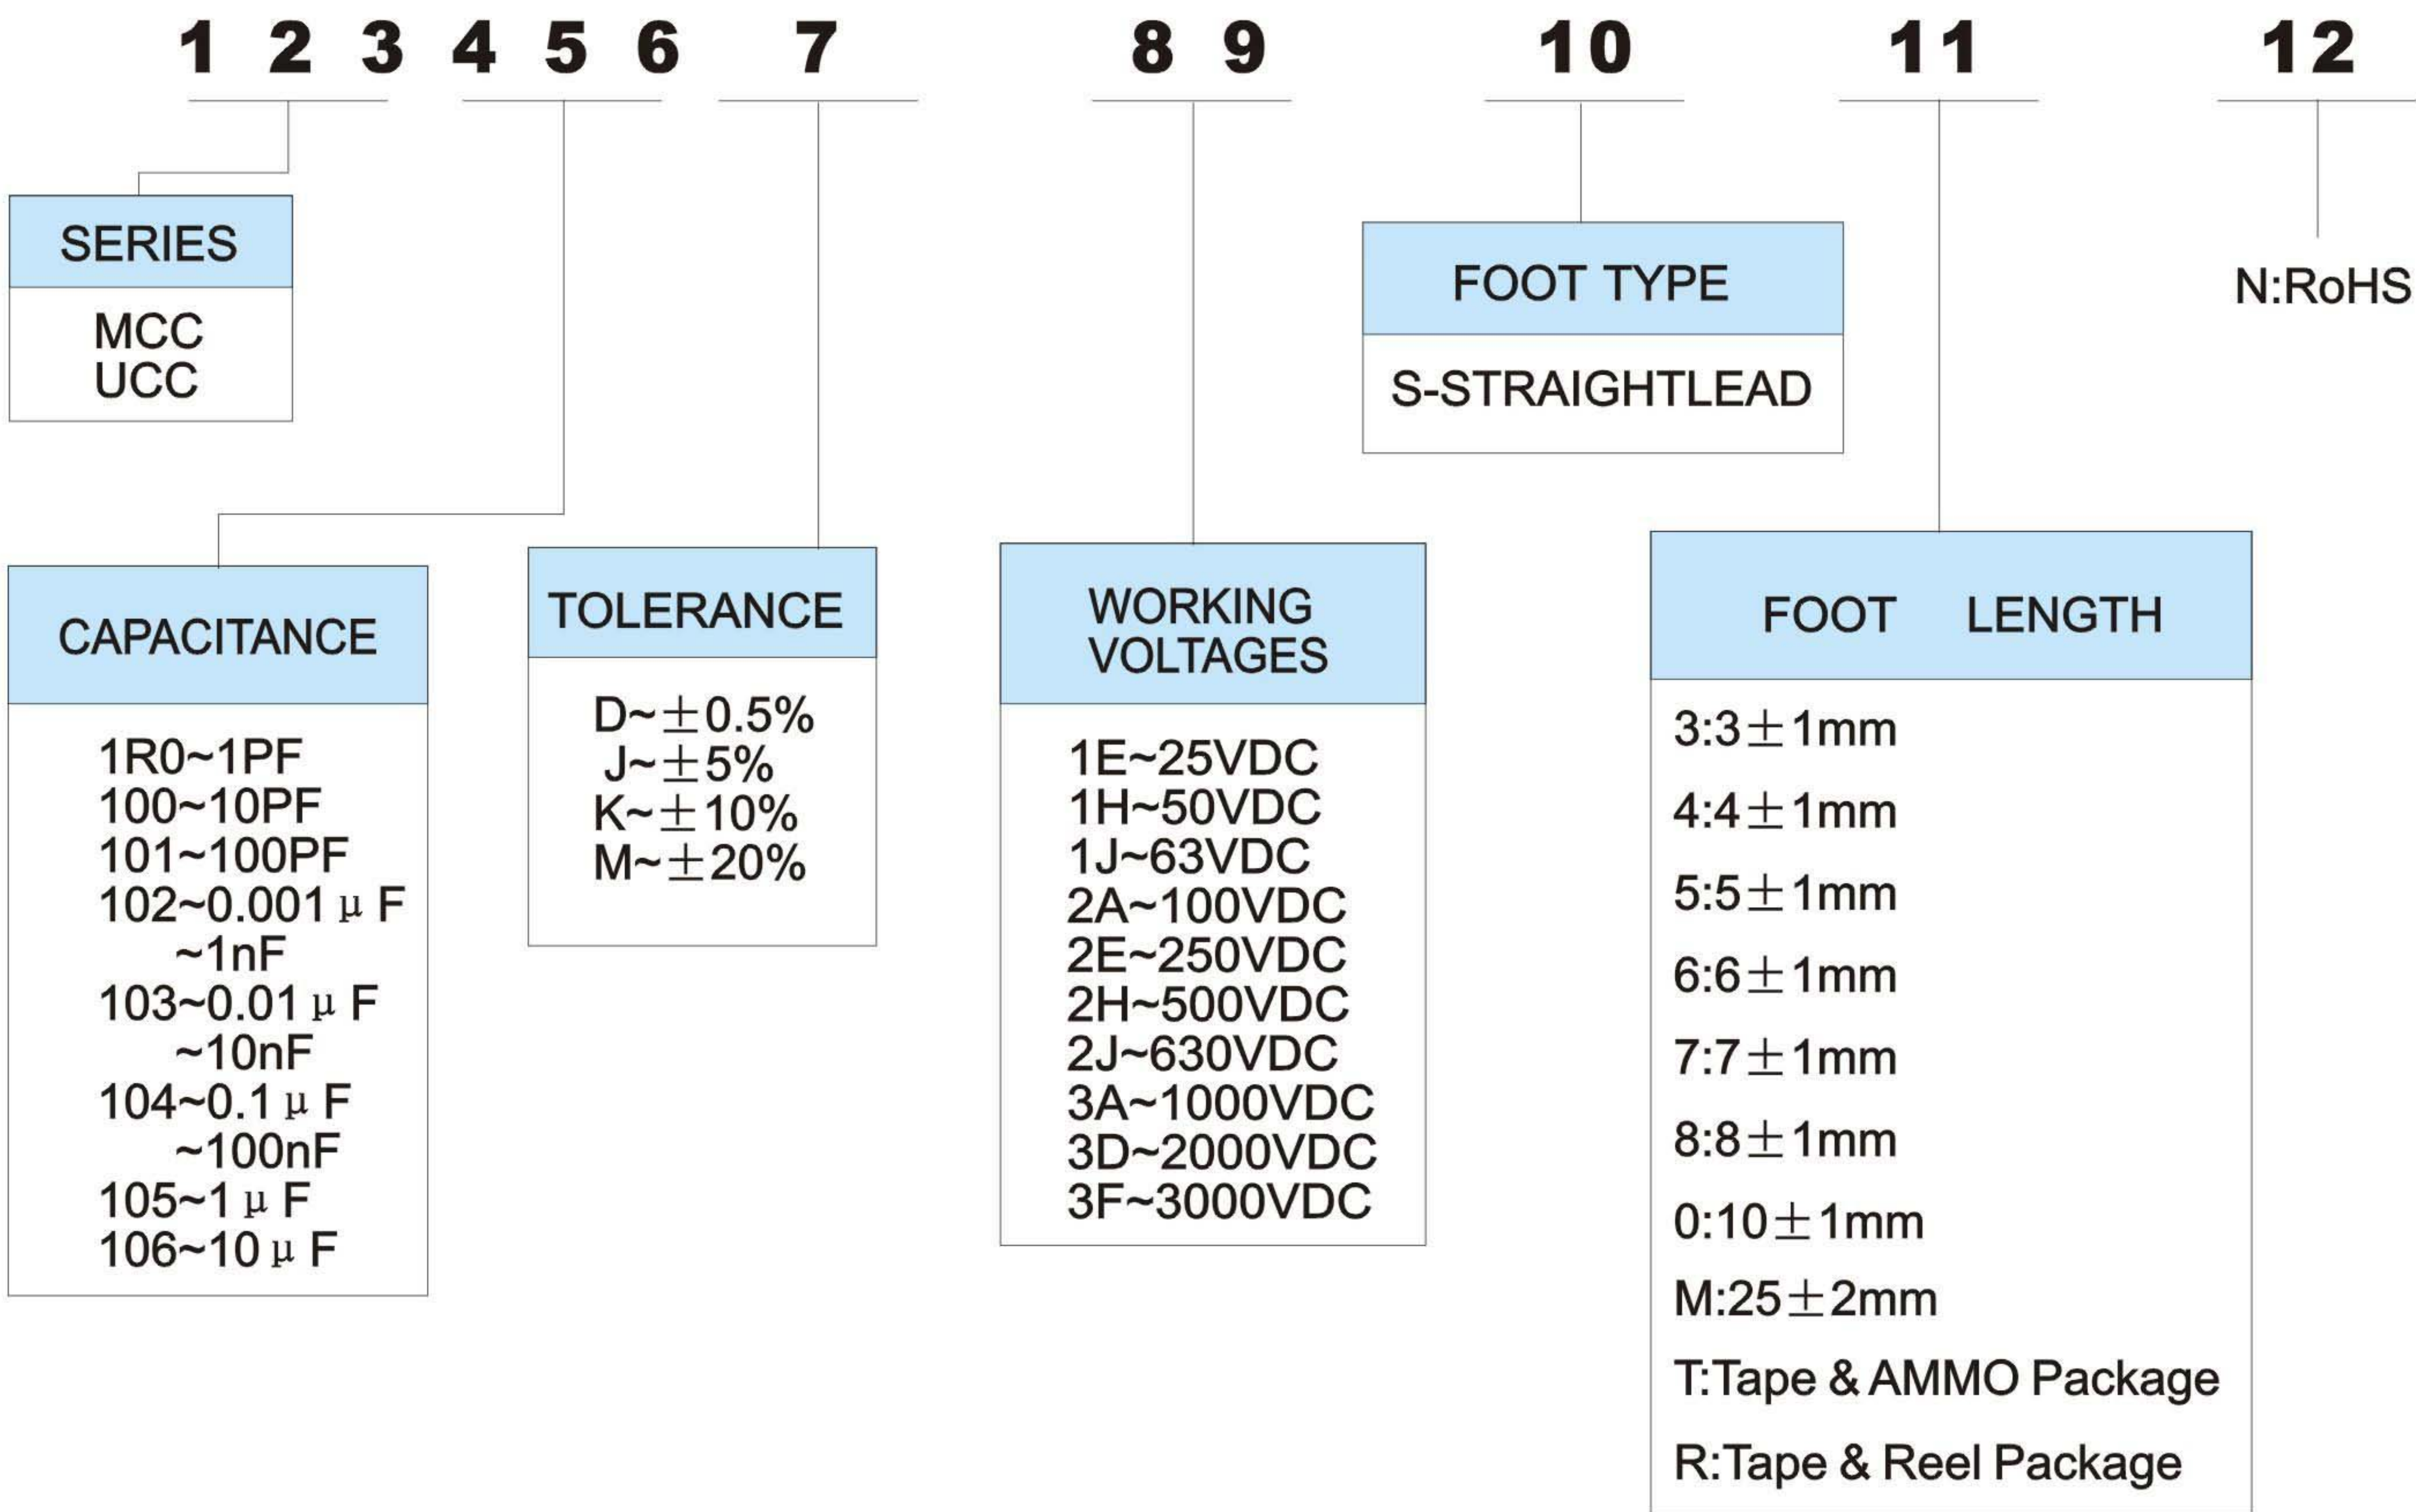

71

Electrical Characteristics

- Capacitance Range : 1pF-10 μ F(use E3/E6 code)
- Oprating temperature : -55℃~+125℃
- Capacitance tolerance : ±0.5pPF(≤10pF), ±5%, ±10%, ±20%
- Temperature characteristic: ±15%
- Insulation Resistance : <0.33 μ F>10,000MΩ ≥0.33 μ F.>500 μ F.MΩ
- Dissipation Factor: <3.5% at +25℃ 1.0±0.25VRms 1KHz(≥100VDC)
<7% at +25℃ 1.0±0.25VRms 1KHz(<100VDC)
<13% at +25℃ 1.0±0.25VRms 1KHz(≤25VDC)
- Dielectric Strength : 13% rated Voltage with 50mA maximum charging current ≤100VDC, ≥100VDC 125% rated Voltage with 50mA maximum charging current
- Life test : (1000hrs)
100% rated Voltage, at +125℃
- Storage: Store all capacitors indoors 5~35℃ humidity <75%.
They are warranted for a period of 2 years from the date of manufacture.

