


MMS Series 馬達運轉啓動電容器

MFRA-TYPE
MFRB-TYPE MFRC-TYPE
RTB-TYPE
RTA-TYPE
1.MFRA-TYPE,ABS CASE

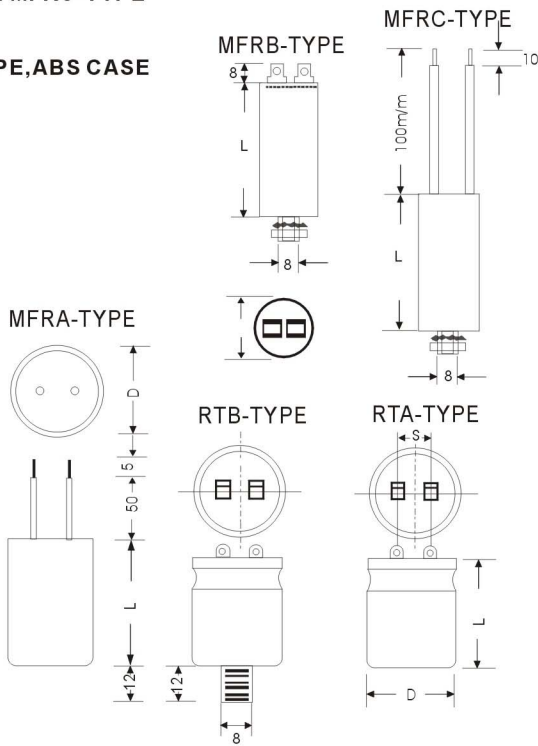

1.MFRA-TYPE, ABS, CASE

RATED VOLTAGE V.A.C	CAPACITANCE (uF)	Size(mm)		
		D	L	S
220-250	2,2.5,3,4.5	25	40	
220-250	6,8,9	25	60	
220-250	10,12,14,15	30	60	
220-250	16,18,20	35	60	
220-250	22,25	40	60	
220-250	30,32,35	45	60	
300-350	2,3,3.5,4	25	60	
300-350	5,6,6.5,7,8	30	60	
300-350	9,10,12	35	60	
300-350	14,15,16	40	60	
300-350	18,19,20,22	45	60	
400-440	1,1.5,2,2.5	25	60	
400-440	3,3.5,4,4.5,5	30	60	
400-440	6,6.5,7,7.5	35	60	
400-440	8,9,10	40	60	
400-440	11,12	45	60	

2.FRA.B TYPE, RC-TYPE, ALUM, CASE

RATED VOLTAGE V.A.C	CAPACITANCE (uF)	Size(mm)		
		D	L	S
220-250	1,1.2,1.5	22	44	7.5
220-250	2,2.5,3	22	44	7.5
220-250	3.5,4,4.5	22	44	7.5
220-250	5,6,6.5	25	44	10
220-250	7,8,9	25	62	10
220-250	7,8,9	30	44	10
220-250	10,11,12	30	44	10
220-250	12.5,13,15,16	30	62	10
220-250	14,15,16	35	44	12
220-250	16,17,18,20	35	62	12
220-250	18,19,20	40	62	14
220-250	25,30,32	40	62	14
220-250	35,40,45	45	62	16
220-250	45,50,55,60	45	115	16

300-350	1,1.2,1.5	22	44	7.5
300-350	2,2.5	25	44	10
300-350	3,3.5	25	62	10
300-350	4,4.5,5	35	44	10
300-350	6,6.5	35	62	10
300-350	7,8,9,10	35	62	12
300-350	11,12	40	62	14
300-350	13,14,15	45	62	16
300-350	16,17,18	40	75	14
300-350	19,20,22	40	102	14
300-350	25,30,32	40	115	14
300-350	35,40,45	51	115	17.5
300-350	47,50,55	56	125	18.5

400-440	1,1.2,1.5	22	44	7.5
400-440	2,2.5	25	44	10
400-440	2.8,3	25	62	10
400-440	3.5,4	30	62	10
400-440	4.5,5	35	62	12
400-440	6,6.5	40	62	14
400-440	7,8	45	62	16
400-440	9,10	35	115	12
400-440	11,12	40	115	14
400-440	13,14,15	45	115	16
400-440	16,17	45	115	16
400-440	18,20,22	51	115	17.5
400-440	25,26,27	51	150	17.5
400-440	30,35,40	56	150	18.5
400-440	45,50	56	174	18.5