
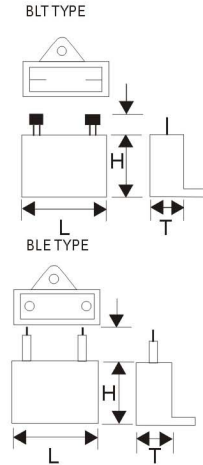
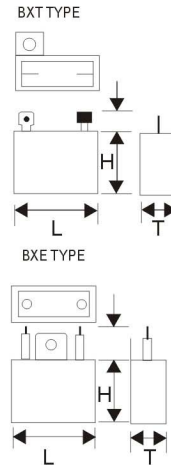
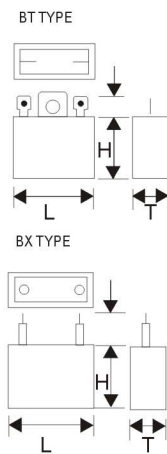


## MMS Series 馬達運轉啓動電容器

Rated working voltage range  
 Capacitance tolerance  
 Operating frequency  
 Operating temperature range  
 Voltage withstand  
 Insulation resistance  
 Dissipation factor ( $\tan \theta$ )

:180,220,250,300,400,450,500,660,800,1000,WVAC  
 :-5%+10%(U), +/-10%(K), = / -5%(J)  
 :50/60 Hz.  
 :25°C~+70°C  
 :(A) Terminal to terminal: Rated voltage by 1.75 for one minute.  
 (B) Terminals to case: Rated Voltage by 2 + 1000v for one minute.  
 :(A) Terminal to terminal  $\geq 1000M \Omega$   
 :(B) Terminal to case  $\geq 2000M \Omega$   
 :0.8% max for MPE or 0.1% max for MPP.

### Dissipation factor ( $\tan \theta$ )

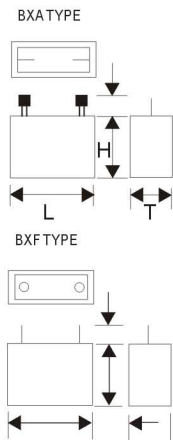

CAPACITANCE ( $\mu F$ )	SIZE(mm)																	
	200V AC			250V AC			300V AC			350V~400V AC			500V AC			600V AC		
	L	T	H	L	T	H	L	T	H	L	T	H	L	T	H	L	T	H
0.5	32	11	19	32	11	19	32	11	19	32	13	23	32	13	23	32	13	23
1	32	12.5	21.5	32	12.5	21.5	32	12.5	12.5	32	13	23	32	13	23	32	13	23
1.5	32	12.5	21.5	32	12.5	21.5	32	14	24	32	13	23	37	15	23	37	15	23
2	32	12.5	21.5	32	13	23	32	14	23	37	15	24	38	17	26	38	17	26
2.5	32	12.5	21.5	32	13	23	37	15	24	38	17	26	38	19	29	38	19	29
3	32	12.5	21.5	32	13	23	37	15	24	38	19	29	39	22	32	39	22	32
3.5	32	12.5	21.5	37	15	24	37	15	24	39	22	32	45	23	34	45	23	34
4	37	15	24	37	15	24	38	17	27	45	23	34	49	20	30	49	20	30
4.5	37	15	24	38	17	27	38	19	29	45	23	34	51	22	32	51	22	32
5	38	17	27	38	17	27	38	19	29	49	20	30	51	22	32	51	22	32
5.5	38	17	27	38	19	29	39	22	32	51	22	32	51	25	36	51	25	36
6	38	17	27	38	19	29	39	22	32	51	22	32	51	25	36	51	30	40
7	38	19	29	38	19	29	51	20	30	51	22	32	51	30	40	51	30	40
8	38	19	29	39	22	32	51	20	30	51	25	36	51	30	40	51	30	40
9	39	22	32	39	22	32	51	22	32	51	25	36	51	30	40	58	35	40
10	39	22	32	51	22	32	51	22	32	51	30	40	51	30	40	58	35	40
12	51	20	30	51	22	32	51	25	36	51	30	40	58	35	40			
14	51	22	32	51	25	36	51	25	36	51	30	40	58	35	40			
16	51	25	36	51	25	36	51	30	40	51	30	40						
18	51	25	36	51	30	40	58	35	40	58	35	40						
20	51	25	36	51	30	40	58	35	40	58	35	40						