


MPL 型燈具電容器 Lamp Capacitor Type

外型圖 OUTLINE DRAWING

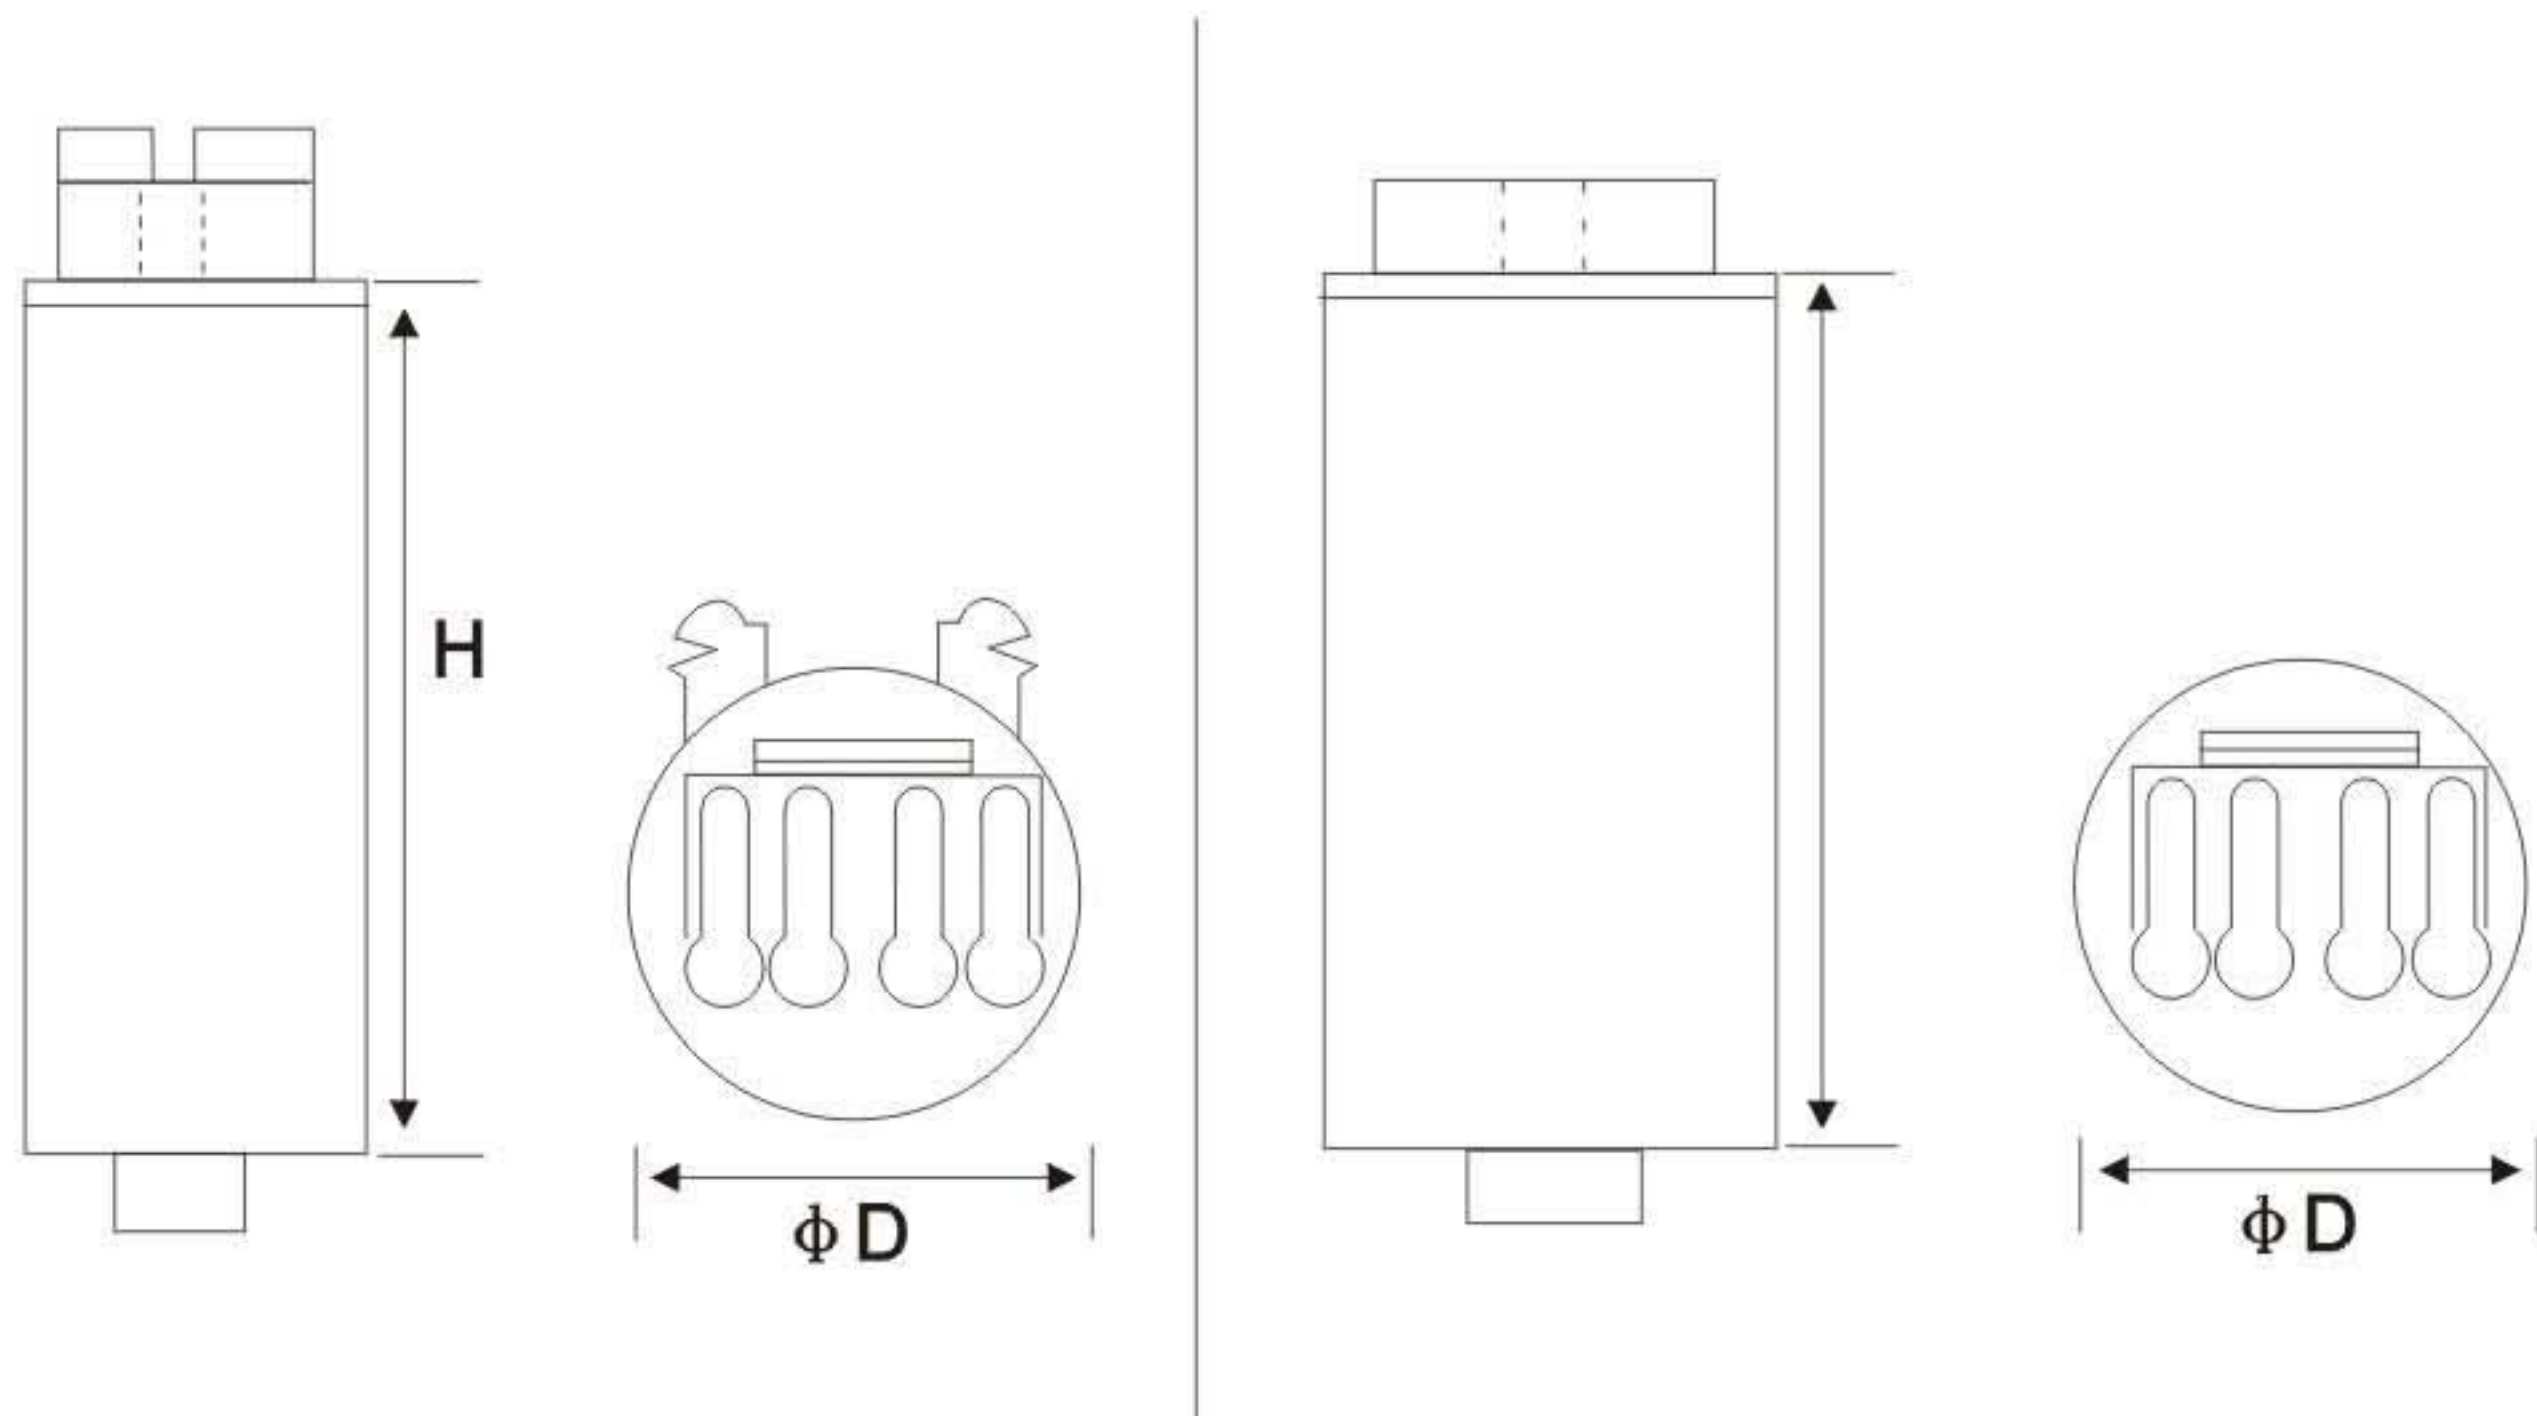

產品介紹 INTRODUCTION

金屬化膜繞卷而成，塑料或鋁外殼封裝，多種引出方式。
The products are made of metallized polypropylene film,encapsulated in a plastic or aluminum case,fetch out in many ways.

特點 FEATURE

- 可靠性高 High stability.
- 絕緣電阻高 High insulation resistance.
- 自愈性好 Excellent Self-healing property.
- 帶自放電安全保護功能 Discharge automatically for protection

用途 APPLICATION

廣泛用于日光燈、高效金屬鹵化物燈等燈具功率補償。
Widely used in fluorescent lamps and halogen lamps.

引用標準 REFERENCE STANDARD

IEC 1048 IEC 1049 Ui810

性能指標 SPECIFICATIONS

| | | |
|----------------------------------|----------------------|---|
| 氣候類別/Climatic Category | | -40/85/21 |
| 容量範圍/Capacitance Range | | 4 μ F~60 μ F |
| 額定電壓/Climatic Voltage | | 125~630 VAC |
| 電容量偏差/Capacitance tolerance | | ±5%(J) ±10%(K) |
| 損耗角正切/Dissipation factor | | ≤4×10 ⁻³ (23℃,f=100Hz) |
| 耐電壓/Withstand voltage | 極間 between terminals | 1.5UR(10S) |
| | 極殼 Terminals to case | 2000V.AC |
| 穩態過電壓 Voltage under steady state | | 允許1.1Un下長期運行 Running under 1.1Un for long-period |
| 穩態過電流 Current under steady state | | 允許1.5In下長期運行 Running under 1.5In for long-period |
| 放電性能 Discharge perfomance | | √2Un下斷開後60S剩于電壓小于50V less than 50V after breakage in 60seconds at√2Un |

具體尺寸和技術參數，可按客戶要求協商確定。 Special requirements can be designed at the request of customers