



Part Number	Inductance (μH)	Test Freq. (MHz)	Tolerance (±%)	Q min.	Test Freq. (MHz)	SRF min. (MHz)	RDC Max. (Ω)	IDC Max. (mA)	Color		
									1ST	2ND	3RD
LNL322522T-1R0□	1.0	7.96	10/5	20	7.96	100	0.08	1500	Brown	Black	Red
LNL322522T-1R5□	1.5	7.96	10/5	20	7.96	80	0.13	1125	Brown	Green	Red
LNL322522T-2R2□	2.2	7.96	10/5	20	7.96	68	0.13	970	Red	Red	Red
LNL322522T-3R3□	3.3	7.96	10/5	20	7.96	54	0.16	837	Orange	Orange	Red
LNL322522T-4R7□	4.7	7.96	10/5	20	7.96	43	0.20	675	Yellow	Violet	Red
LNL322522T-6R8□	6.8	7.96	10/5	20	7.96	33	0.27	600	Blue	Gray	Red
LNL322522T-100□	10	2.52	10/5	15	2.52	28	0.36	520	Brown	Black	Orange
LNL322522T-150□	15	2.52	10/5	15	2.52	19	0.56	480	Brown	Green	Orange
LNL322522T-220□	22	2.52	10/5	15	2.52	16	0.77	310	Red	Red	Orange
LNL322522T-330□	33	2.52	10/5	15	2.52	12	1.10	270	Orange	Orange	Orange
LNL322522T-470□	47	2.52	10/5	15	2.52	10	1.64	210	Yellow	Violet	Orange
LNL322522T-680□	68	2.52	10/5	15	2.52	9	2.80	189	Blue	Gray	Orange
LNL322522T-101□	100	0.796	10/5	15	0.796	6	3.70	145	Brown	Black	Yellow
LNL322522T-151□	150	0.796	10/5	15	0.796	5	6.10	120	Brown	Green	Yellow
LNL322522T-221□	220	0.796	10/5	15	0.796	4	8.40	100	Red	Red	Yellow
LNL322522T-331□	330	0.796	10/5	15	0.796	3.5	12.3	80	Orange	Orange	Yellow
LNL322522T-471□	470	0.796	10/5	15	0.796	2.8	22.0	75	Yellow	Violet	Yellow
LNL322522T-681□	680	0.796	10/5	15	0.796	2	28.0	65	Blue	Gray	Yellow

Test Instruments : HP4291A Impedance / Material Analyzer

Typical L vs. Frequency

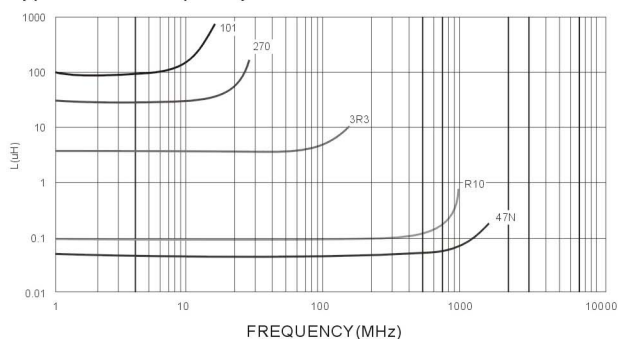


Typical Q vs. Frequency

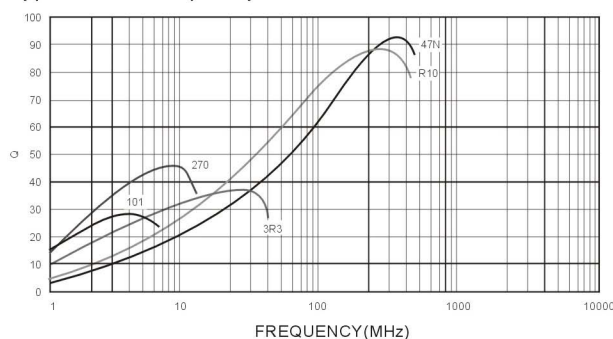


202

Packaging Specifications

Tape Dimensions

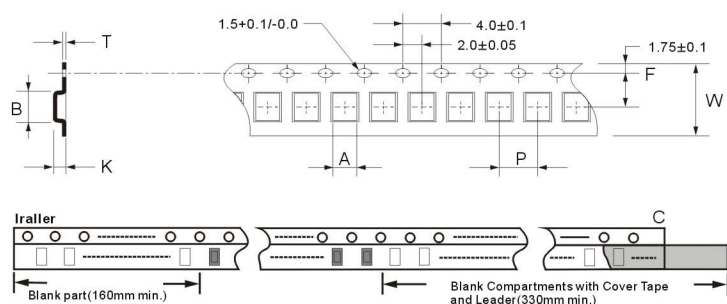

Reel Dimensions

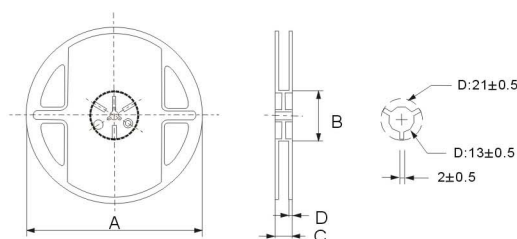

Dimensions in mm

Type	Tape Dimensions							Reel Dimensions				Q'ty/Reel
	A	B	T	W	P	F	K	A	B	C	D	
LNL060311	1.15	1.83	0.23	8	4	3.5	1.00	178	60	12	1.5	4000
LNL201614	1.85	2.45	0.23	8	4	3.5	1.45	178	60	12	1.5	2000
LNL252018	2.70	2.95	0.23	8	4	3.5	2.25	178	60	12	1.5	2000
LNL322522	2.95	3.85	0.25	12	4	3.5	2.45	178	60	16	1.4	2000