



Packaging Information for AC Horizontal Taping In Reel:

Configuration: • For C0204 Series

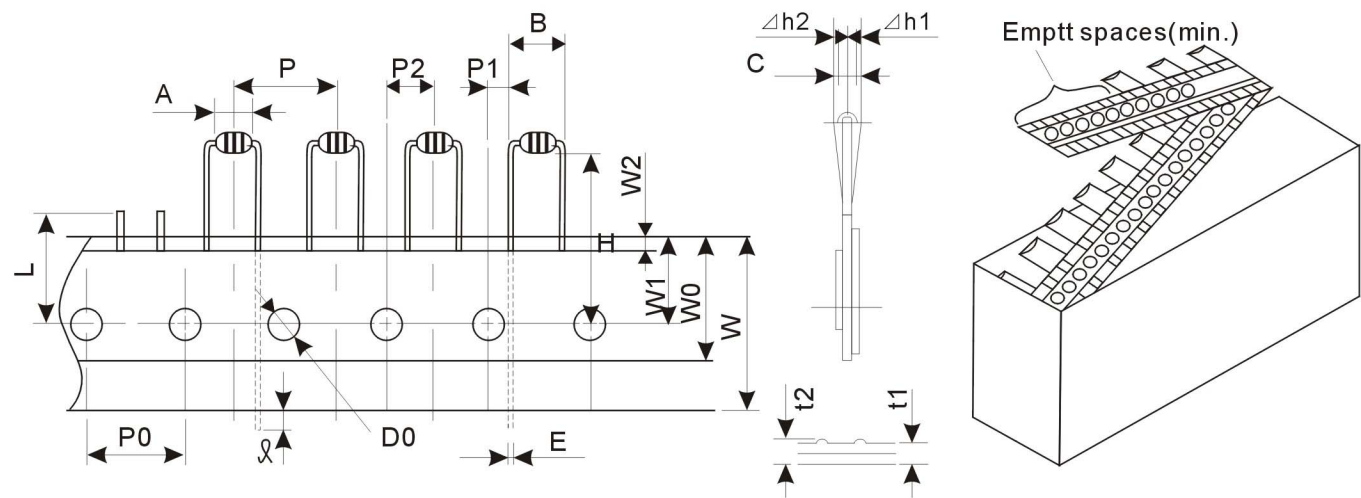

• For C0307/C0405/C0410/C0512 Series

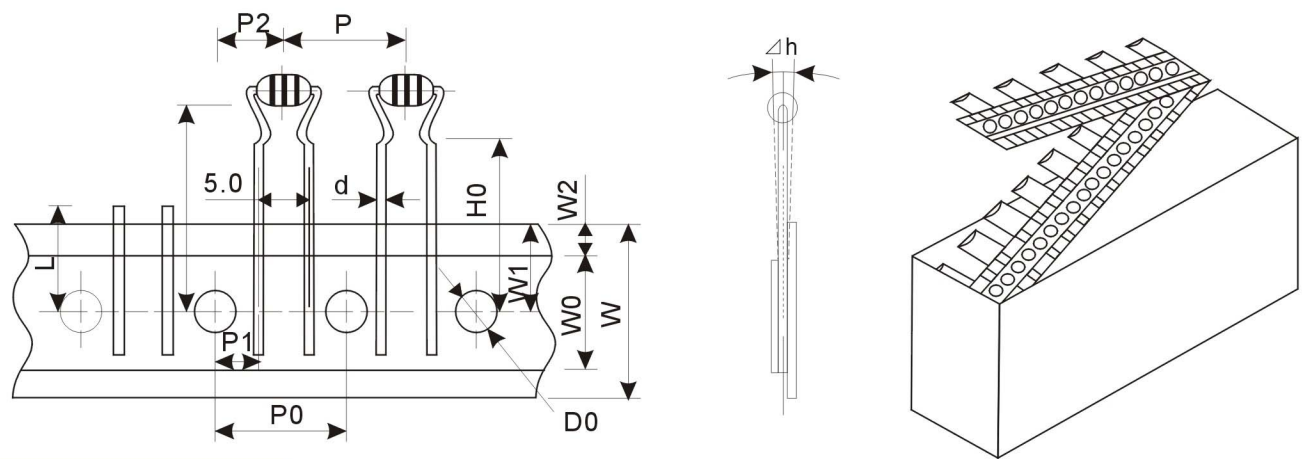

Dimensions:(mm) • For C0204 Series

Item	Specification	Item	Specification	Item	Specification
A	3.40 max.	P1	3.85±0.70	t1	0.60±0.30
B	5.00 ^{+0.8} _{-0.2}	P2	6.35±1.30	t2	1.50 max.
C	2.40 max.	W	18.00 ^{+0.8} _{-0.2}	Δ	0.00 max.
E	Φ0.48±0.05	W0	15.00 min.	H	16.0±0.50 (9PF)
L	11.00 max.	W1	9.00±0.50		18.0±0.50 (8PF)
D0	4.00±0.20	W1	3.00 max.		19.5±0.50 (10PF)
P	12.7±1.00	Δh1	1.00 max.		20.0±0.50 (PF)
P0	12.7±0.30	Δh2	1.00 max.		

• For C0307/C0405/C0410/C0512 Series

Item	Specification	Item	Specification
P	12.7±1.0	W0	12.5 ⁻⁰
P0	12.7±0.3	W1	9.0±
P1	3.85±0.7	W2	3.0
P2	6.35±1.3	H	20.0
d	0.60	H0	16.0±0.5
F	0.50	D0	4.0±0.3
Δh	0.00±2.0	t	0.7±0.2
W	8.00± ¹ _{0.5}	L	11.0 ⁺⁰