
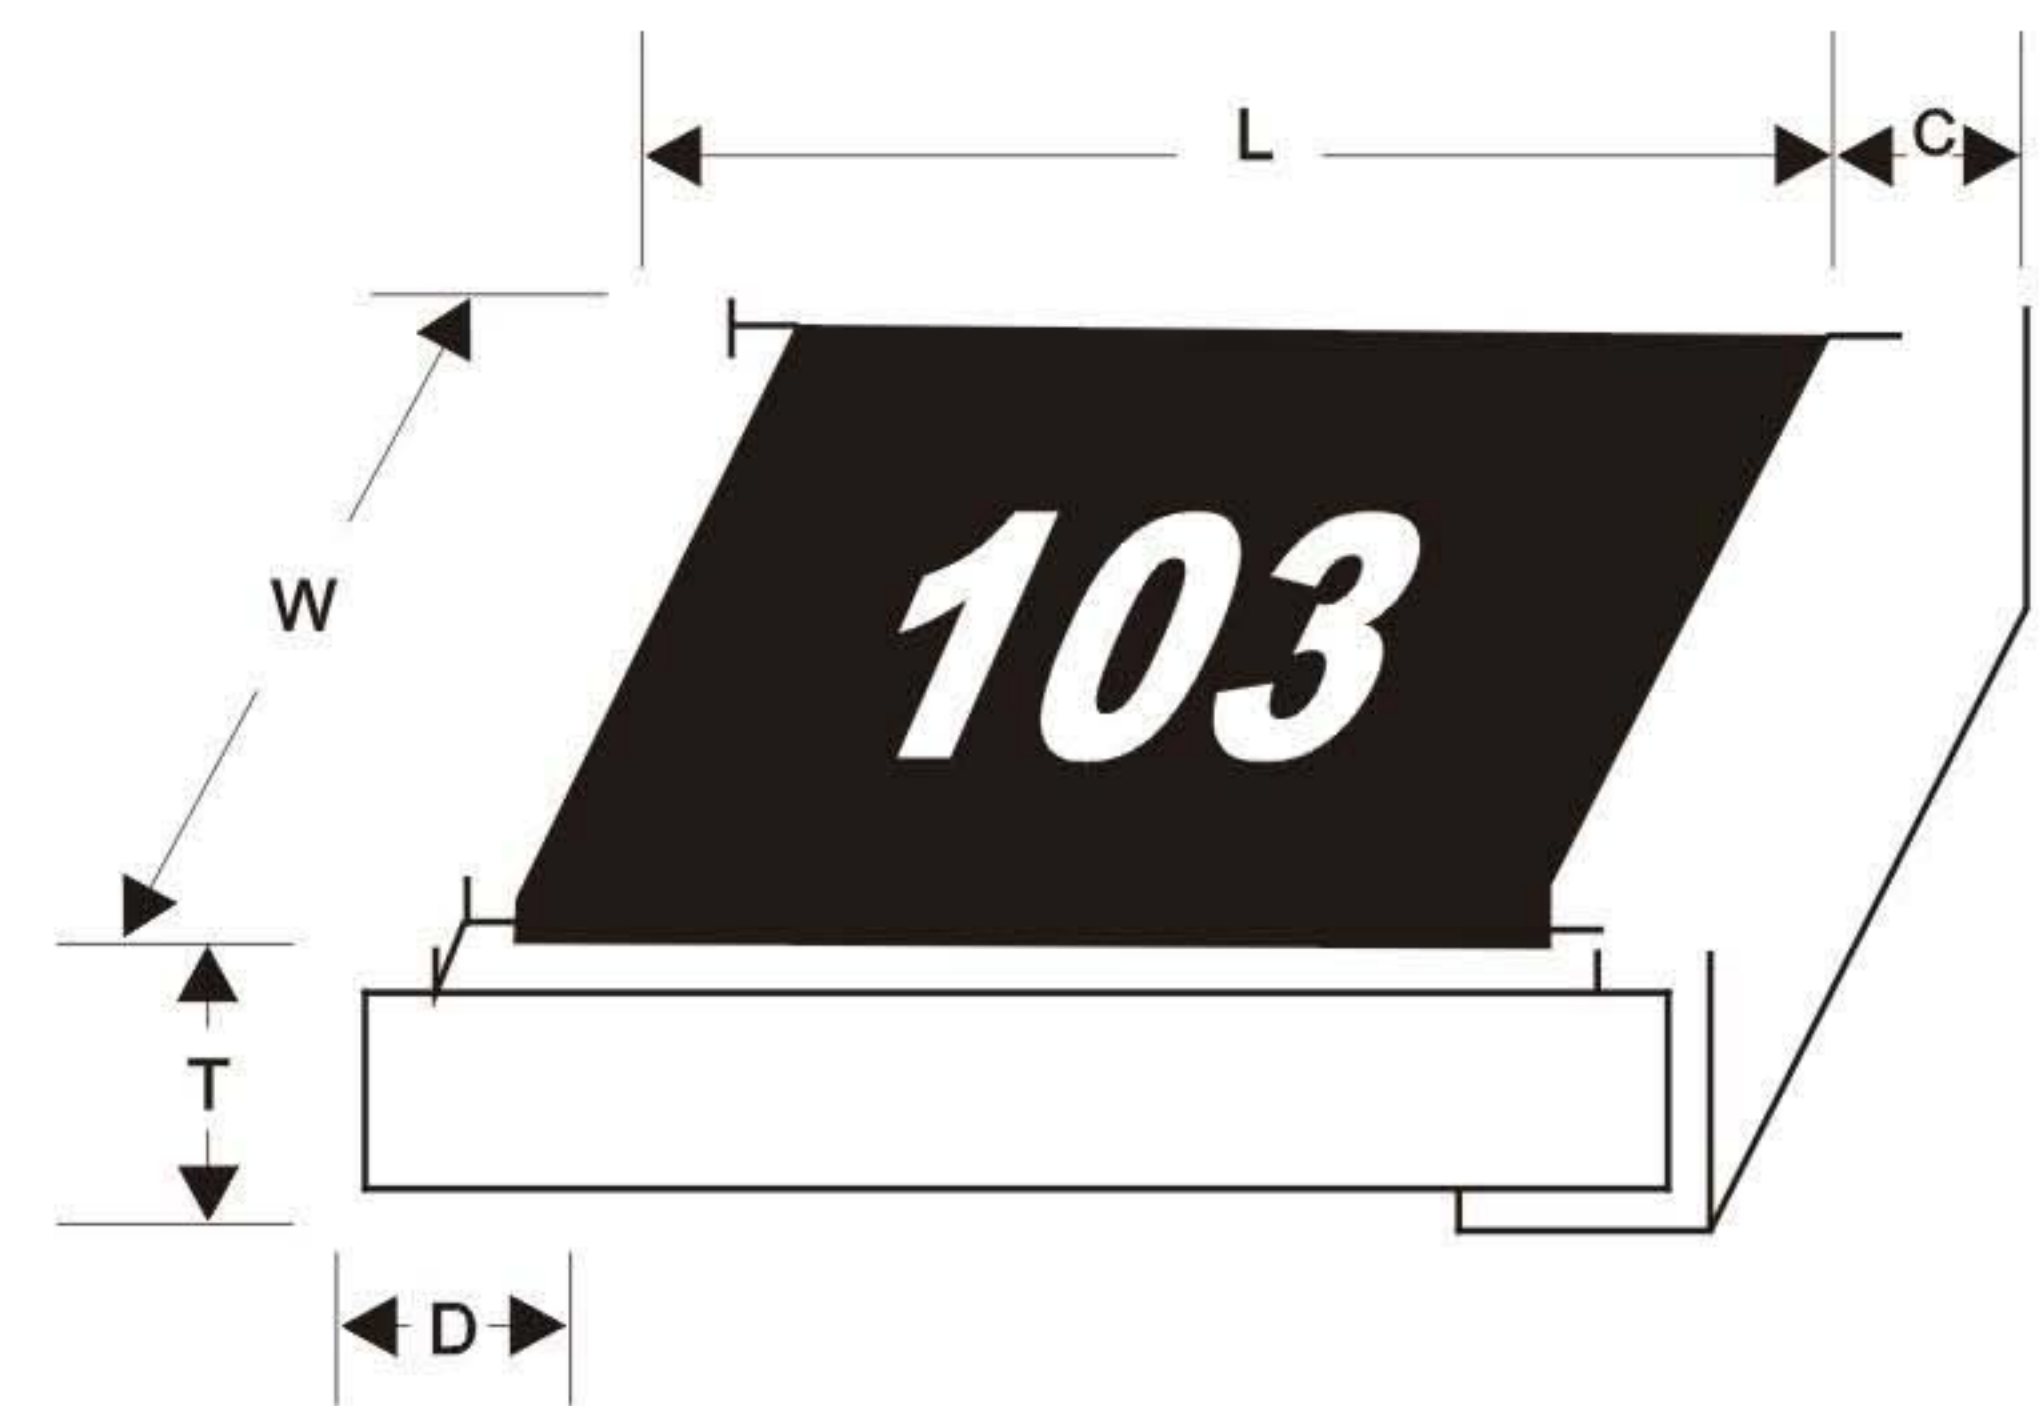


CR series 厚膜晶片電阻

特性: (Features)

- 信賴性高: 金屬厚膜電阻體加玻璃保護層及三層電極構造, 可靠度高。
Highly reliable multilayer electrode construction.
- 輕薄短小: 小型輕量, 大幅縮小PC板面積及重量
Extremely thin and light.
- 裝配性佳: 外觀尺寸均勻精確, 易于裝配。
Highly stable in auto-placement surface mounting applications.

構造圖 (Construction)

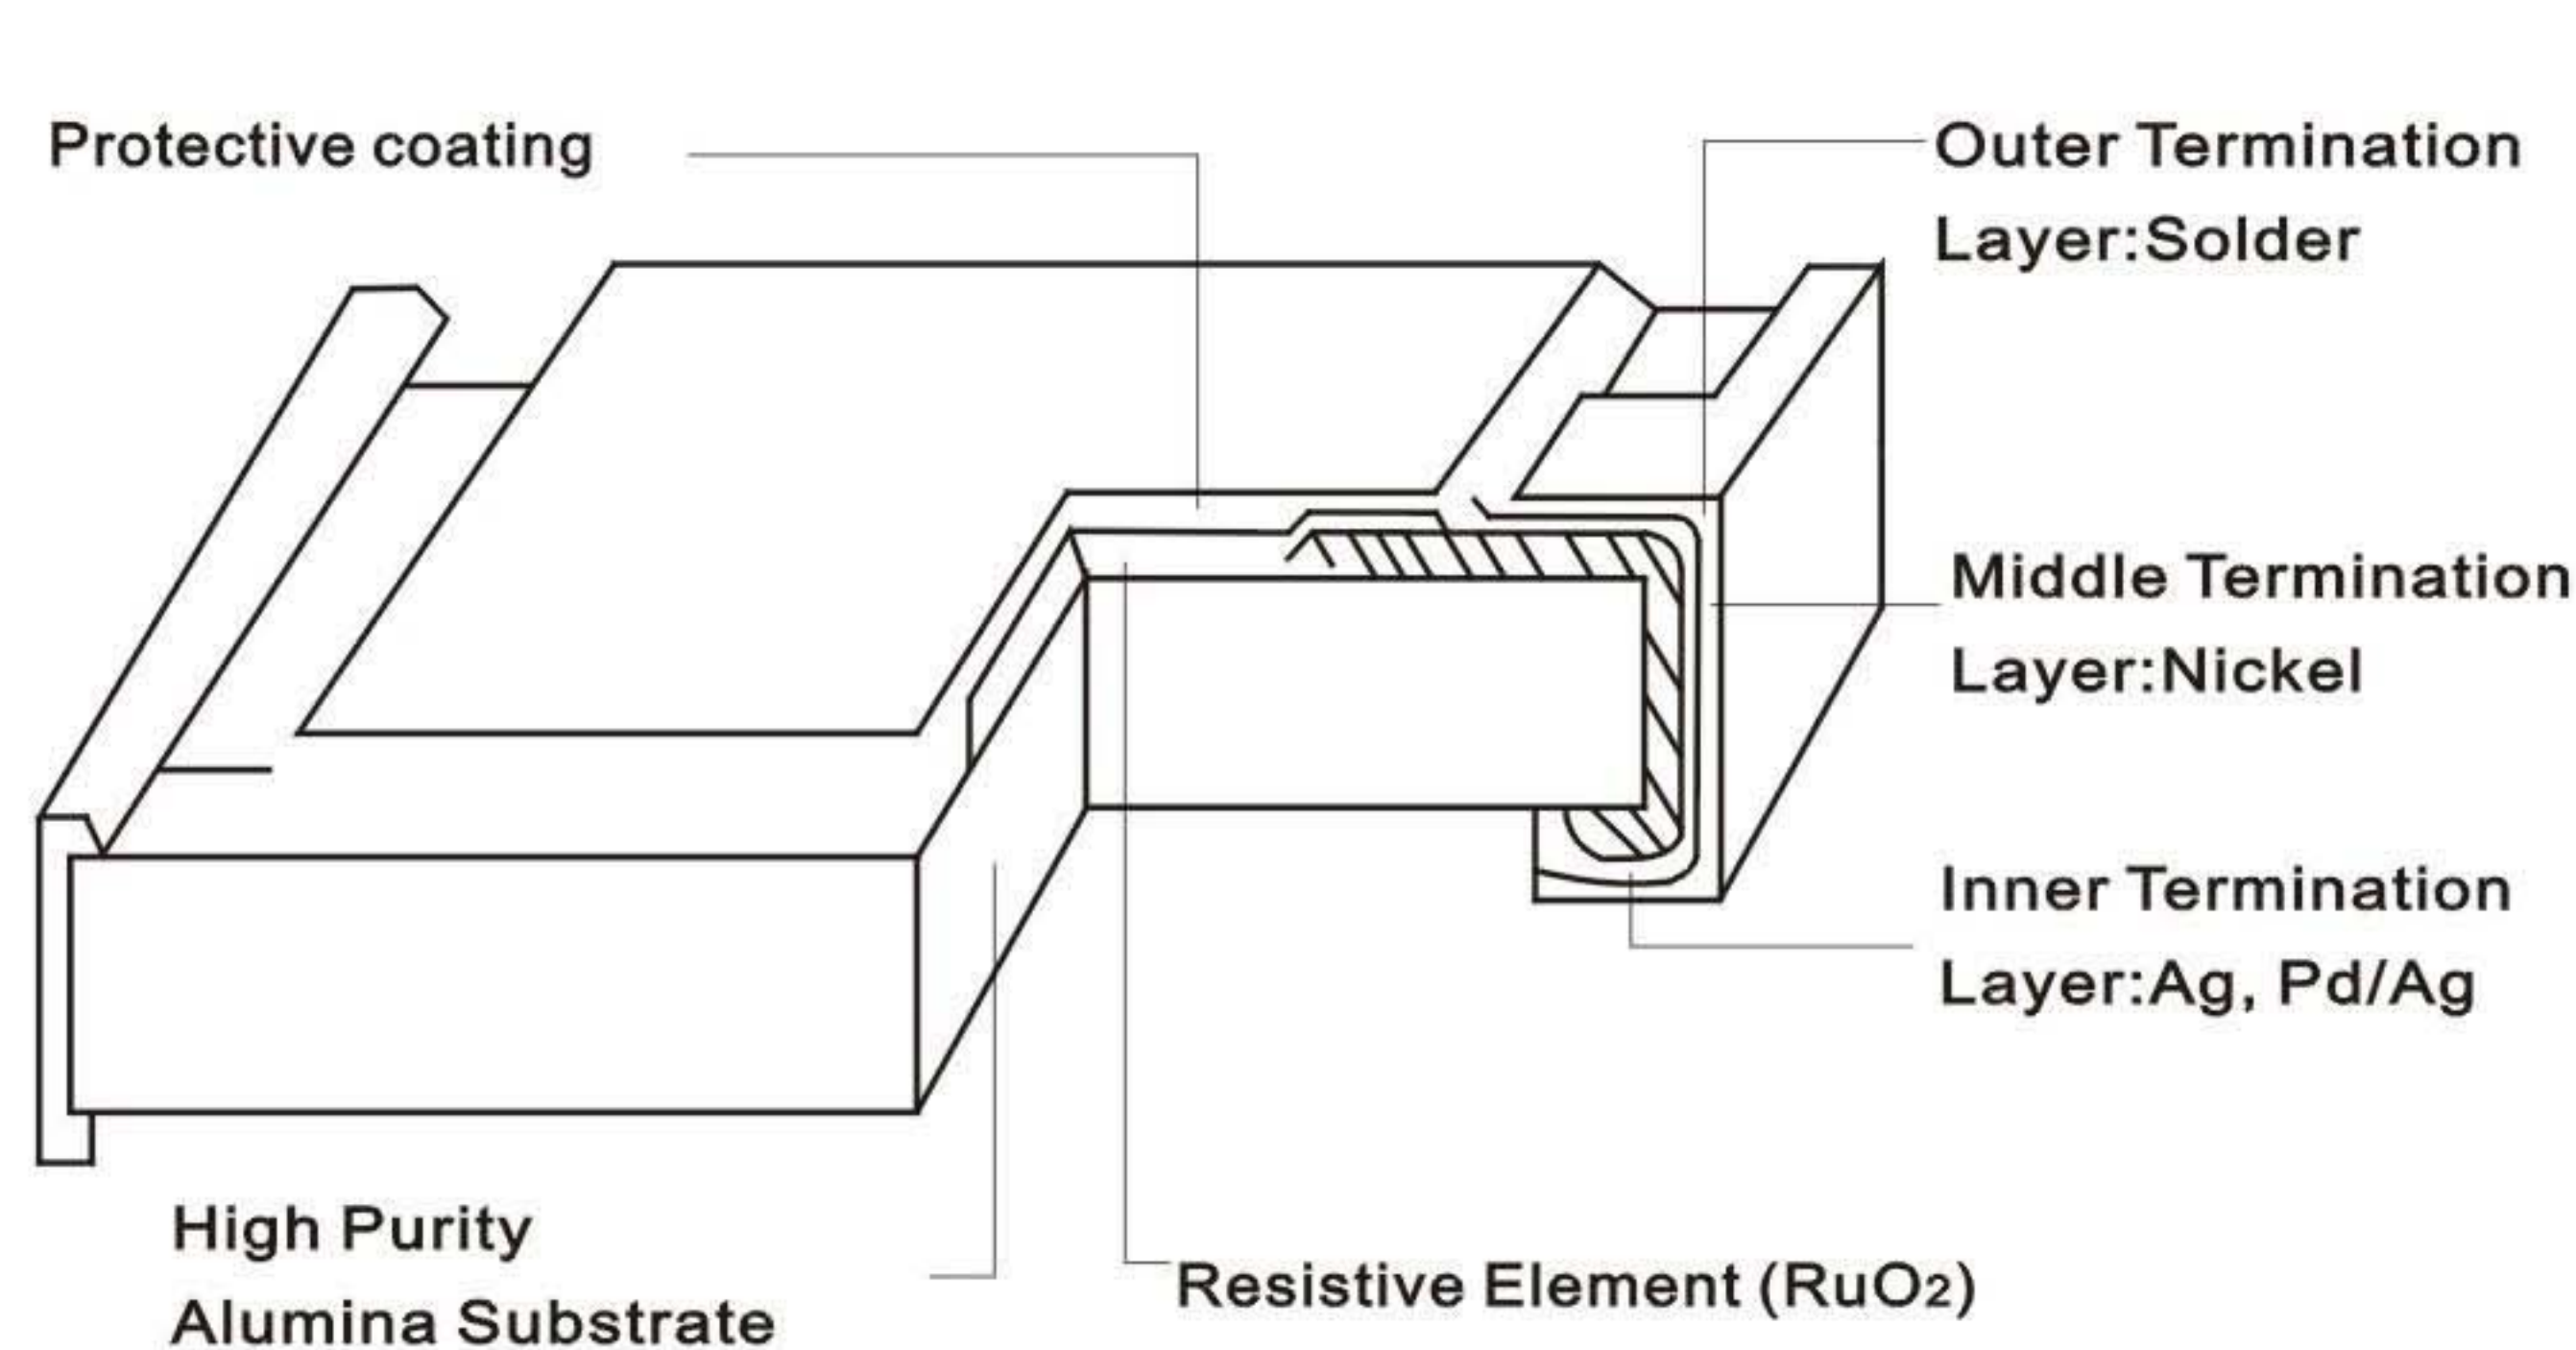

Unit: mm

型 號 (TYPE)	尺 寸 Dimensions				
	L	W	C	D	T
CR01(0201)	0.50±0.10	0.30±0.10	0.10±0.10	0.10±0.20	0.25±0.10
CR02(0402)	1.00±0.10	0.50±0.10	0.20±0.20	0.20±0.20	0.35±0.10
CR03(0603)	1.60±0.10	0.80±0.10	0.30±0.20	0.30±0.20	0.45±0.10
CR05(0805)	2.00±0.15	1.20±0.15	0.40±0.20	0.40±0.20	0.50±0.10
CR06(1206)	3.10±0.15	1.60±0.15	0.50±0.25	0.50±0.25	0.55±0.10
CR20(2010)	5.00±0.20	2.50±0.20	0.60±0.25	0.60±0.25	0.60±0.10
CR25(2512)	6.30±0.20	3.10±.020	0.60±0.25	0.60±0.25	0.60±0.15

功率衰減曲線(Power Derating Curve)

當使用于環境溫度70℃ 以上時,
額定功率將如右圖之曲線衰減。

For resistors operated in ambient
temperatures above 70℃, power
rating must be derated in accord-
ance with the curve below.

