

HVS Series 表面粘著型105°C

尺寸 DIMENSIONS

∅D	L	A	B	C	W	P
3	5.5	3.3	3.3	3.3	0.5~0.8	0.8
4	5.5	4.3	5.0	5.1	0.5~0.8	1.0
5	5.5	5.3	6.0	5.9	0.5~0.8	1.4
6.3	5.5	6.6	7.0	7.2	0.5~0.8	1.9
6.3	6.0	6.6	6.6	6.6	0.5~0.8	2.2
8	6.5	8.3	8.3	9.0	0.5~0.8	2.3
8	10.5	8.3	8.3	9.0	0.7~1.1	3.1
10	10.5	10.3	10.3	11.0	0.7~1.1	4.5
12.5	13.5/16	12.8	12.8	13.5	2~2.5	8.0
16	16.5	16.3	16.3	17.0	3.5~3.8	10.5
18	16.5/21.5	19	21.5	21.5	3.5~3.8	11.5
20	21.5	21	23.5	23.5	3.5~3.8	13.5

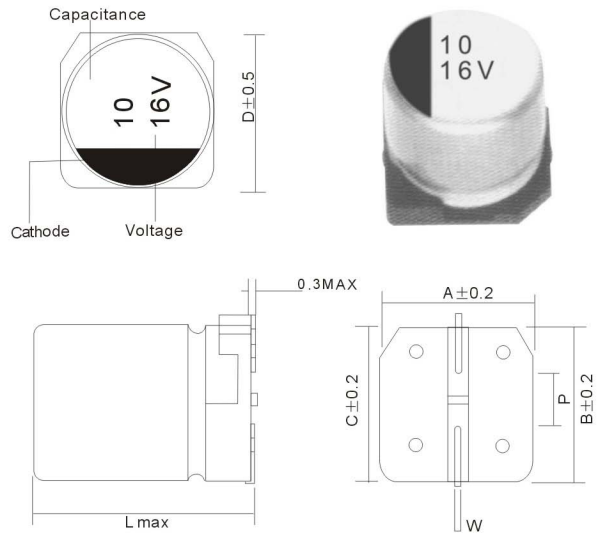


DIAGRAM OF DIMENSIONS:(UNIT:mm)

Case size $\phi D \times L$ (mm). Maximum Ripple Current(Unit=mA,rms,120Hz at 105°C)

WV (SV)	4 (5)		6.3 (8)		10 (13)		16 (20)		25 (32)		35 (44)		50 (63)		63 (79)		100 (125)		
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	
0.1~0.47													3×55 4×55	1~4					
1													3×55 4×55	8.4	4×55	10	4×60	10	
2.2												3×55	10	4×55	13	4×55 5×55	15	63×60	20
3.3												3×55	16	4×55	17	5×55	20	63×60 63×77	28
4.7												3×55 4×55	16	4×55	18	5×55	20	5×55	23
10												3×55 4×55	19 23	5×55	27	5×55	29	63×55	33
22	3×55	19	4×55	28	5×55	33	5×55	37	63×55	42	63×55	46	63×60 63×77	80	63×77	88	8×105	130	
33	4×55	28	5×55	37	5×55	41	63×55	49	63×55	52	63×60 63×77	58	8×65	100	8×105	160	10×105	190	
47	4×55	33	5×55	45	63×55	52	63×55	58	63×55 63×60	60	63×77 8×65	115	8×105	140	8×105	170	10×105 125×135	332	
100	5×55	56	63×55	70	63×55	76	63×55	86	63×77 8×65	160	8×105	280	8×105 10×105	300	10×105 125×135	320	125×16 16×16.5	430	
220	63×55	96	63×60 63×77	150	63×77 8×65	190	8×105	290	8×105	300	10×105	370	10×105	390	125×135	420	18×16.5 16×21.5	660	
330	63×60 8×65	145	63×77 8×65	210	8×105	330	8×105	330	8×105 10×105	480	10×105	520	125×135	560	16×16.5	680	18×21.5	820	
470	63×77 8×105	220	8×105	380	8×105	480	8×105 10×105	520	10×105	580	125×135	620	16×16.5	680	16×16.5	730			
1000	8×105 10×105	400	10×105	500	10×105	560	125×135	620	125×135	680	16×16.5	1000	16×21.5 18×21.5	980					
2200			125×135	850	125×16	900	16×16.5	1100	18×16.5	1150	18×21.5	1500							
3300			16×16.5	1200	16×16.5	1300	18×16.5	1400	18×21.5	1700									
4700			16×16.5	1400	18×16.5	1500	18×21.5	1700											
6800			18×16.5	1600	18×21.5	1800													

(μ F) 額定靜電容量	160 (200)	200 (250)	250 (315)	400 (450)	450 (500)
3.3					12.5×13.5 40
4.7				12.5×13.5 50	12.5×13.5 50
10			12.5×13.5 70	16×16.5 85	16×16.5 80
22		12.5×13.5 80	12.5×16 110	18×16.5 130	16×21.5 130
33			12.5×16 110	18×16.5 180	18×21.5 160
47	12.5×16 100	16×16.5 220	18×16.5 240	20×21.5 180	
68	16×16.5 260	18×16.5 280	18×21.5 300		
100	18×16.5 320	18×21.5 350			

鋁殼尺寸
 $\phi D \times L$ (mm) 額定紋波
(Ripple)