

LVS Series 表面粘著型85°C

尺寸 DIMENSIONS

∅D	L	A	B	C	W	P
3	5.5	3.3	3.3	3.3	0.5~0.8	0.8
4	5.5	4.3	5.0	5.1	0.5~0.8	1.0
5	5.5	5.3	6.0	5.9	0.5~0.8	1.4
6.3	5.5	6.6	7.0	7.2	0.5~0.8	1.9
6.3	6.0	6.6	6.6	6.6	0.5~0.8	2.2
8	6.5	8.3	8.3	9.0	0.5~0.8	2.3
8	10.5	8.3	8.3	9.0	0.7~1.1	3.1
10	10.5	10.3	10.3	11.0	0.7~1.1	4.5
12.5	13.5/16	12.8	12.8	13.5	2~2.5	8.0
16	16.5	16.3	16.3	17.0	3.5~3.8	10.5
18	16.5/21.5	19	21.5	21.5	3.5~3.8	11.5
20	21.5	21	23.5	23.5	3.5~3.8	13.5

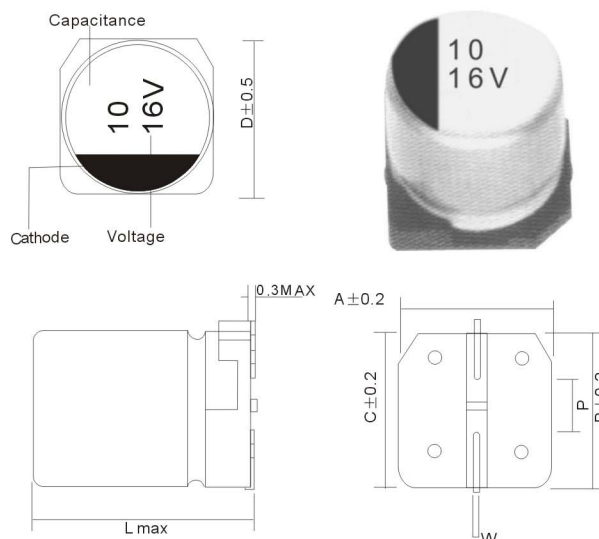


DIAGRAM OF DIMENSIONS:(UNIT:mm)

Case size $\phi D \times L$ (mm). Maximum Ripple Current(Unit=mA,rms,120Hz at 85°C)

WV (SV)	4 (5)		6.3 (8)		10 (13)		16 (20)		25 (32)		35 (44)		50 (63)		63 (79)		100 (125)	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1~0.47													3×55 4×55	1~4				
1													3×55 4×55	8.4	4×55	10	4×60	10
2.2											3×55	10	4×55 5×55	13	4×55 5×55	15	63×60	20
3.3											3×55	16	4×55	17	5×55	20	63×60 63×7.7	28
4.7									3×55 4×55	16	4×55	18	5×55	20	5×55	23	63×60 63×7.7	35
10							3×55 4×55	19 23	5×55	27	5×55	29	63×55	33	63×55	35	63×7.7 8×10.5	50
22	3×55	19	4×55	28	5×55	33	5×55	37	63×55	42	63×55	46	63×7.7	80	63×7.7	88	8×10.5	130
33	4×55	28	5×55	37	5×55	41	63×55	49	63×55	52	63×7.7	58	8×6.5	100	8×10.5	160	10×10.5	190
47	4×55	33	5×55	45	63×55	52	63×55	58	63×7.7	60	63×7.7 8×6.5	115	8×10.5	140	8×10.5	170	10×10.5 125×13.5	332
100	5×55	56	63×55	70	63×55	76	63×55	86	63×7.7 8×6.5	160	8×10.5	280	10×10.5	300	10×10.5	320	125×16 16×16.5	430
220	63×55	96	63×7.7	150	63×7.7 8×6.5	190	8×10.5	290	8×10.5	300	10×10.5	370	125×13.5	390	125×13.5	420	18×16.5 16×21.5	660
330	63×60 8×6.5	145	63×7.7 8×6.5	210	8×10.5	330	8×10.5	330	10×10.5	480	10×10.5	520	125×13.5	560	16×16.5	680	18×21.5	820
470	63×7.7 8×10.5	220	8×10.5	380	8×10.5	480	10×10.5	520	10×10.5	580	125×13.5	620	16×16.5	680	18×16.5	730		
1000	8×10.5	400	8×10.5	500	10×10.5	560	125×13.5	620	125×13.5	680	16×16.5	1000	16×21.5 18×21.5	980				
2200			125×13.5	850	125×16	900	16×16.5	1100	18×16.5	1150	18×21.5	1500						
3300			16×16.5	1200	16×16.5	1300	18×16.5	1400	18×21.5	1700								
4700			16×16.5	1400	18×16.5	1500	18×21.5	1700										
6800			18×16.5	1600	18×21.5	1800												
10000			18×21.5	2000	20×21.5	2200												

(μF) 額定静電容量	160 (200)	200 (250)	250 (315)	400 (450)	450 (500)
4.7				12.5×13.5	115
10			12.5×13.5	150	16×16.5
22		12.5×13.5	235	12.5×16	240
33		12.5×16	310	16×16.5	340
47	12.5×16	370	16×16.5	415	18×16.5
68	16×16.5	500	18×16.5	505	18×21.5
100	18×16.5	590	18×21.5	590	20×21.5
					鋁殼尺寸 $\phi D \times L$ (mm)
					額定紋波 (Ripple)