


Outline drawing:(Unit:mm)

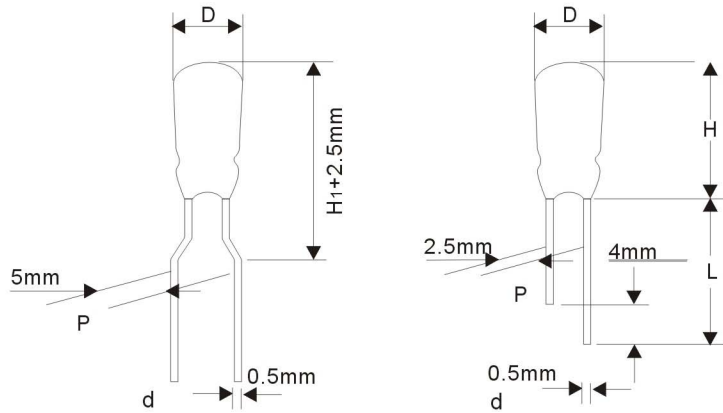

Unit(mm)					
D Φ (+0.5Max)	4.5	5.5	6.5	8.5	10.5
F (± 0.5)	2.5 ± 0.5		3.5 ± 0.5		5.0 ± 0.5
d Φ (± 0.02)	0.5				

Example of Code Number(ERC Series 16V 10 μ F)				
ERC	AF	106	K	B
Series	Rated	Capacitance	Tolerance	Suffix
Code	voltage			

note: k'' is added in the suffix only for products that are $\pm 10\%$ tolerance

136

Case Size Table

Code for rated voltage Code for capacitance μ F		W.V.	Φ DXL(mm)					
			6.3	10	16	25	35	50
			FC	AO	AF	BE	CE	EO
0.1	104							4.5X10
0.15	154							4.5X10
0.22	224							4.5X10
0.33	334							4.5X10
0.47	474							4.5X10
0.68	684							4.5X10
1.0	105							4.5X10
1.5	155						4.5X10	4.5X10
2.2	225				4.5X10	4.5X10	4.5X10	4.5X10
3.3	335				4.5X10	4.5X10	4.5X10	4.5X10
4.7	475	4.5X10	4.5X10	4.5X10	4.5X10	4.5X10	4.5X10	4.5X10
6.8	685	4.5X10	4.5X10	4.5X10	4.5X10	4.5X10	4.5X10	4.5X10
10	106	4.5X10	4.5X10	4.5X10	4.5X10	5.5X10	6.5X10	6.5X10
15	156	4.5X10	4.5X10	4.5X10	5.5X10	6.5X10	6.5X10	6.5X10
22	226	4.5X10	4.5X10	5.5X10	6.5X10	6.5X10	6.5X10	6.5X10
33	336	5.5X10	5.5X10	5.5X10	6.5X10	8.5X10		
47	476	5.5X10	5.5X10	6.5X10	6.5X10	8.5X10		
68	686	6.5X10	6.5X10	6.5X10	8.5X10			
100	107	6.5X10	6.5X10	8.5X10	8.5X10			
150	157	6.5X10	6.5X10	8.5X10				
220	227	8.5X10	8.5X10	8.5X14				
330	337	8.5X10	8.5X10					
470	447	8.5X14	8.5X14					